



IDEM mono pojačalo


Opće specifikacije

Frekvencijski odziv:	5 Hz–40 kHz ($\pm 0,2$ dB)
Snaga 8/4/2 Ω :	200/400/700 W
Lokalni i globalni NFB:	0 dBV
THD:	0,002% (pri 20 W) 0,05% (pri 50 W) 0,25% (pri punoj snazi od 200 W)
Pojedinačni harmonici na 50 W:	2. 0,004% 3. 0,028% 4. 0,002% 5. 0,006% 7. 0,003%
Viši harmonici:	0,0005%
Dinamički raspon:	125 dB (neprigušeno)
Ulazna impedancija:	200 k Ω balansirani XLR, 100 k Ω nebalansirani RCA
Konstantna izlazna impedancija:	0,002 Ω (pri 10 W) 0,012 Ω (pri 50 W) 0,018 Ω (pri punoj snazi)
Konstantni faktor prigušenja:	800 (pri 50 W, opterećenje 8 Ω)
Pomak na izlazu zvučnika:	± 3 mV tip., ± 10 mV maks. (DC)
Dimenzije (VDSŠ):	420 x 380 x 180 mm
Težina:	35 kg


Ulazna osjetljivost za punu snagu

Pojaćanje XLR:	14 dB	18 dB	22 dB	26 dB	30 dB	34 dB
Napon:	8.2 V	5.5 V	4.4 V	2.35 V	1.4 V	0.9 V
Pojaćanje RCA:	20 dB	24 dB	28 dB	32 dB	36 dB	40 dB
Napon:	4.1 V	2.25 V	2.2 V	1.17 V	0.7 V	0.45 V


THD (%) u odnosu na snagu

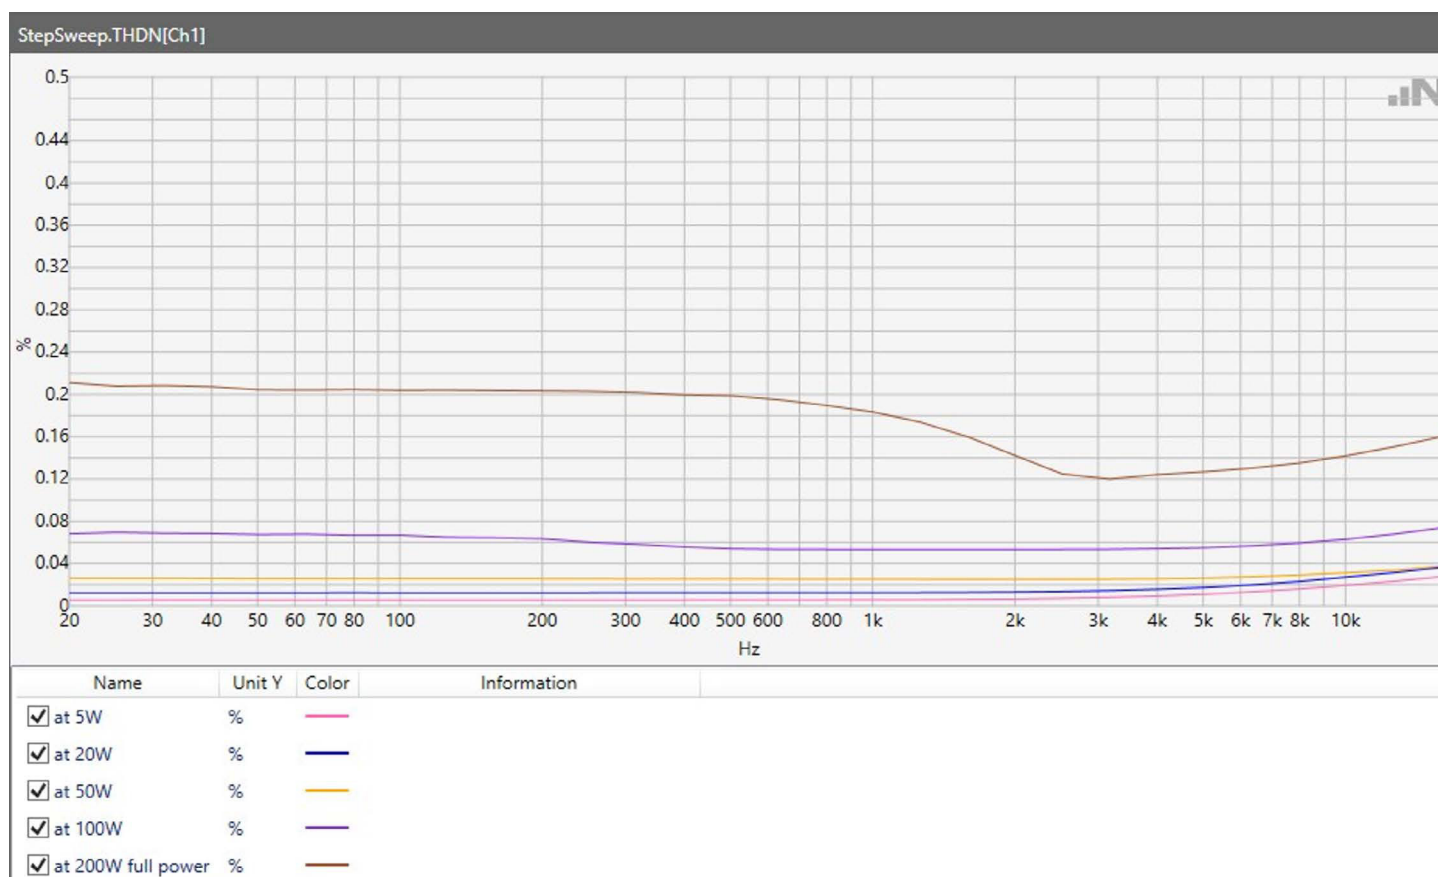

Harmonijsko izobličenje prikazano u pojedinačnim harmonicima

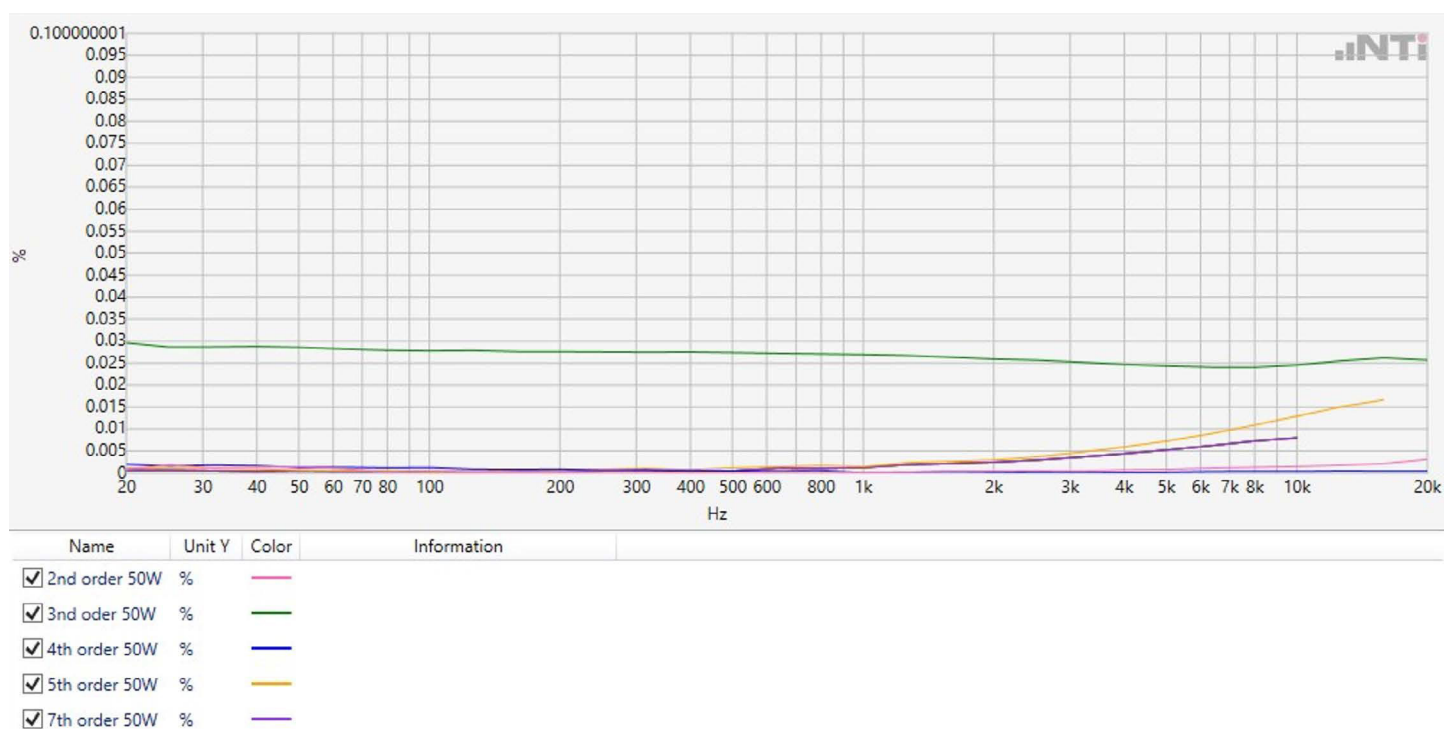

Dinamički raspon (neponderiran)

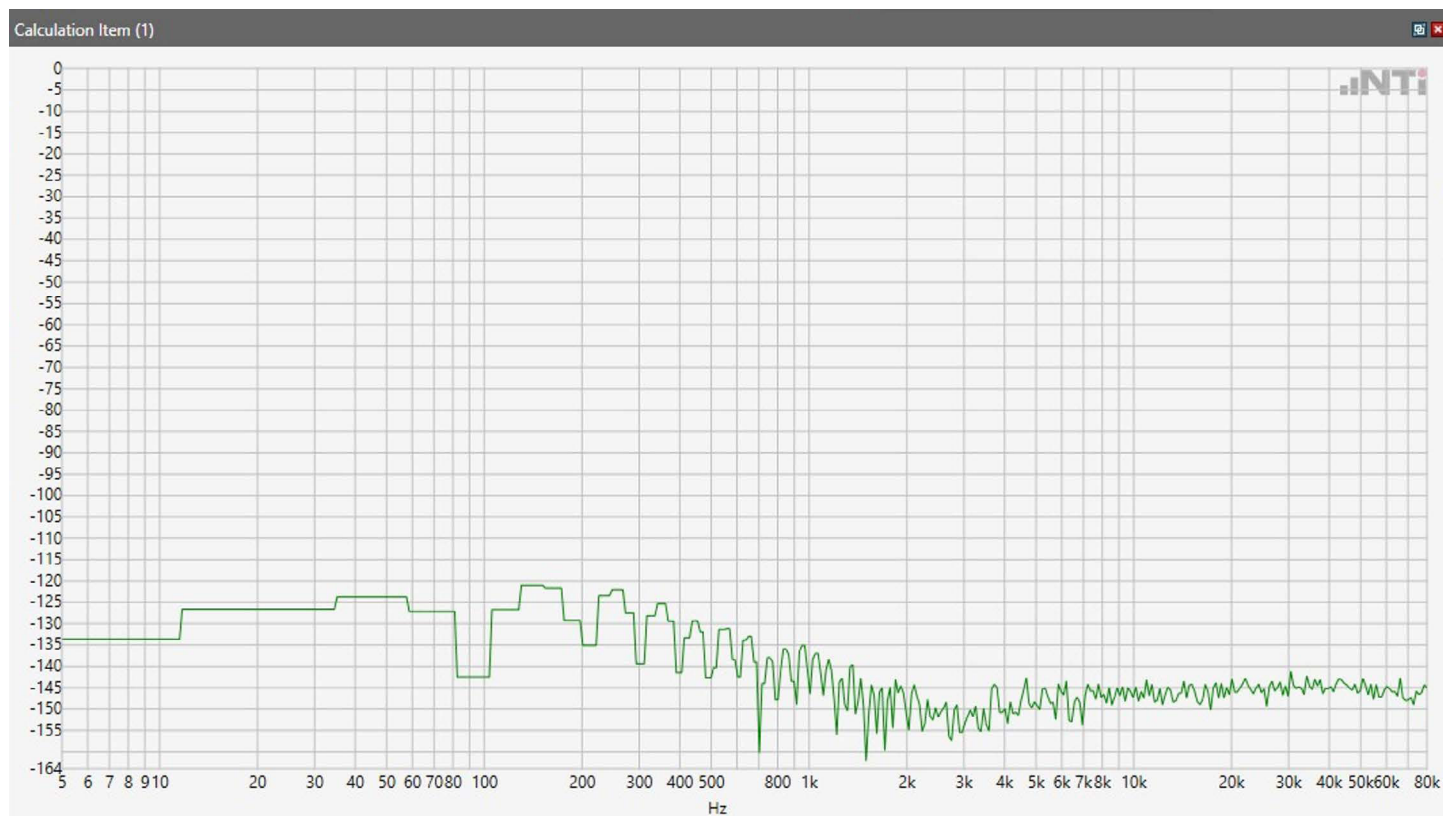

Intrinzična i konstantna izlazna impedancija

